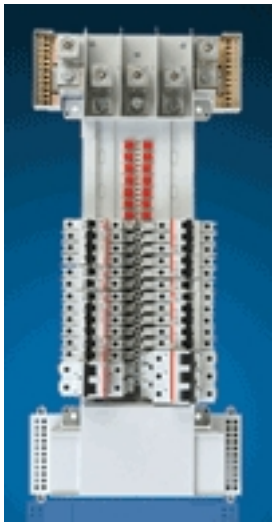

Safe Panelboard Installation And Maintenance

The ProLine Panelboard family from ABB's Low Voltage Products division has been certified as touch-safe per IP20 standards by Certifi-Group, a U.S.-based regulatory compliance and product-safety-testing organization. ProLine Panelboard products completely isolate personnel during installation and maintenance, eliminating the chance of human exposure to any energized components. Branch and main breakers are selectively coordinated and current-limited, allowing for quick clearing of faults. The amount of energy let-through (I2T) during a fault event is reduced, as is arc flash risk.

ABB Low Voltage Products
New Berlin, WI

For more info, enter 31 at www.MT-freeinfo.com

Wear Compound Repairs Most Surfaces

Kalpoxy NS from Abresist Kalenborn is a non-sagging epoxy bonded wear compound suitable for repairing almost any surface, including piping and pumps. The two-component wear compound contains more than 70% fine grain silicon carbide (SiC) particles, which combine with DuPont Kevlar® fibers for excellent abrasion resistance, toughness and adhesive properties. Kalpoxy NS can be used in temperatures up to 230 F (110 C) and in corrosive situations with a pH range of 3.8 to 10.0.

Abresist Kalenborn Corp.
Urbana, IN

For more info, enter 32 at www.MT-freeinfo.com

Battery For UPS And Generator Applications

The Genesis® NP9-12 battery from EnerSys® is suited for uninterruptible power supply (UPS) systems and portable generator applications. Measuring 5.94” long, 2.56” wide and 4.02” high, it features a nominal capacity of 9.0 amp hours and 36 watts per cell. The product is available with a .250 terminal or an M5 bolt, and comes in cases made of standard ABS resin or optional flame-retardant material.

EnerSys
Reading, PA

For more info, enter 33 at www.MT-freeinfo.com

Improved Maneuvering Of Heavy, Bulky Tools

Esco Tool's MILLHOG® ET-800 Dual Spring Hanger lets users safely maneuver all types of heavy or bulky tools that need to be jogged into position. It features a top and bottom steel plate, two drawbar springs and a built-in safety chain that prevents the springs from bottoming out, wearing excessively and breaking. Rated at 610 lbs. each, the drawbar springs are mounted onto 8" W x 3/8" steel plates, permitting 3.5" of travel stopped by the 48" L safety chain.

Esco Tool

A Unit of Esco Technologies, Inc.
Holliston, MA

For more info, enter 34 at www.MT-freeinfo.com

Rugged Family Of Easy-To-Use Clamp Meters

Fluke's line of 320 Series True-rms Clamp Meters is engineered for noise-free, reliable measurements in the toughest environments. Designed for long service life and ease of application, they're suited for rugged, all-purpose use in residential, commercial, HVAC/R and light industrial electrical applications. Features include CAT III 600 V/CAT IV 300 V safety ratings and True-rms ac voltage and current for accurate measurement of non-linear signals.

Fluke Corp.
Everett, WA

For more info, enter 35 at www.MT-freeinfo.com

No-Fault Thermal-Imager Warranty

Wahl Instruments has introduced a new program related to its Inspector series of Thermal Imaging Cameras. Each Wahl Heat Spy Inspector series unit now comes with a NO FAULT warranty called SPY-CARE ™. It covers any unintentional damage to or breakage of a Wahl Inspector Series imager within two years of the original purchase date, no matter the cause. Under terms of this war-ranty, Wahl will repair or replace the damaged or broken camera at no charge.

Wahl Instruments, Inc.
Asheville, NC

For more info, enter 36 at www.MT-freeinfo.com

[illegible] www.MT-freeinfo.com

[illegible] www.MT-freeinfo.com